



PYL12V100FS

Release 2

12V 100Ah-8Hr



Proven in the real world, the PYL Series of telecom batteries provides security and long life in extreme climates where other VRLA batteries just don't survive. The PYL technology utilizes proprietary lead alloys and active material additives. The PYL Series is the most cost effective battery solution over the total life cycle and for initial installation in your network.

- Primary lead for Long Life
- UL94 V-0 flame retardant case
- High temperature, long life design
- AGM and spill-proof construction
- Harnesses/connecting bars available
- No maintenance required
- 10+ years design life
- SR-4228 compliant
- UL recognized
- ABS plastic case for durability

SPECIFICATIONS

* Maximum Charge Current is 25% of the 8 Hr. Rate

Nominal Voltage (V)	Rated Capacity Rate In Ah * 8 Hr	Ambient Temperature		Outer Dimensions								Weight		Terminal
		Charge / Discharge	Storage	L		W		H		TH		kg	lbs.	
				mm	in.	mm	in.	mm	in.	mm	in.			
12	100 Ah	-15 to 50°C (5 to 122°F)	-15 to 40°C (5 to 104°F)	395	15.6	106	4.2	289.5	11.4	289.5	11.4	34.0	75.0	Front-M6 Bolt

Amperes to Final voltage: 1.75V per cell @ 25°C (77°F)




DISCHARGE TIME (Hr)

2	3	4	5	6	7	8	9	10	12	20
39.9	28.3	22.2	18.4	15.8	13.9	12.5	11.2	10.3	8.8	5.5

Watts to Final voltage: 1.75V per cell @ 25°C (77°F)

DISCHARGE TIME (Hr)


2	3	4	5	6	7	8	9	10	12	20
470	333	261	216	185	163	146	132	121	102	65

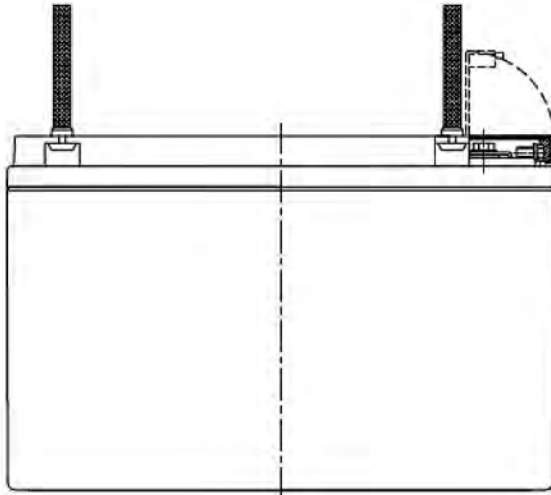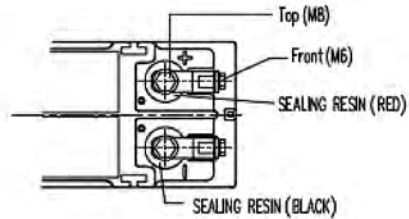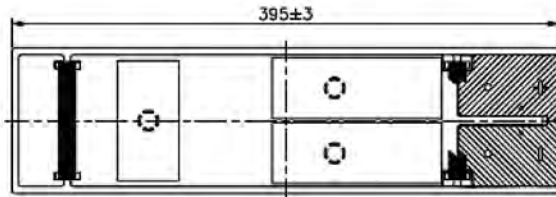


units: mm

- **Float Charge Voltage: 13.65V +/- 0.15V**
- **Temperature Compensation: The recommended compensation factor is -3mv/°C/cell. The standard center point for temperature compensation is 25°C.**
- **Internal Resistance: Approximately 3.5mΩ measured with 1kHz AC bridge**
- **Terminal Torque: 90in.lbs. (13mm, top); 43.5in.lbs. (10mm, front)**


Charging Characteristics (2.275V/cell)

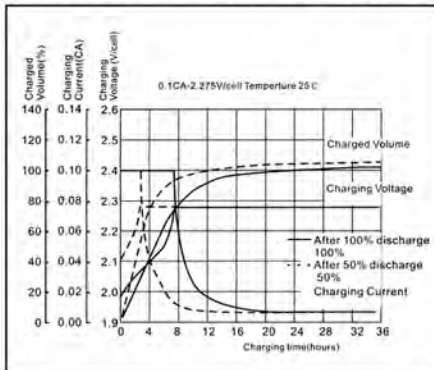

Self-discharge Characteristics

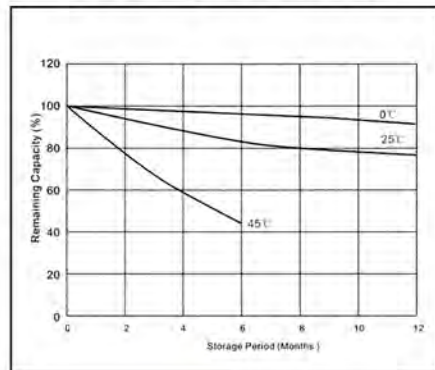

Discharge Characteristics

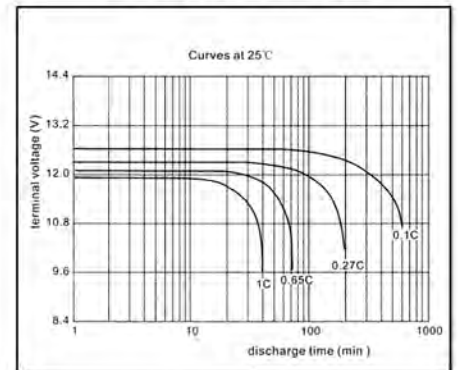

500-100-018 ver.2.0 2-2015

GS BATTERY (U.S.A.) INC.
 1150 Northmeadow Parkway, Suite 110
 Roswell, GA 30076
 800-472-2879

