



PYL12V160FT

12V 160Ah-8Hr



Proven in the real world, the PYL Series of telecom batteries provides security and long life in extreme climates where other VRLA batteries just don't survive. The PYL technology utilizes proprietary lead alloys and active material additives. The PYL Series is the most cost effective battery solution over the total life cycle and for initial installation in your network.

- Primary lead for Long Life
- UL94 V-0 flame retardant case
- High temperature, long life design
- AGM and spill-proof construction
- Harnesses/connecting bars available
- No maintenance required
- 10+ years design life
- GR-4228 compliant
- UL recognized
- ABS plastic case for durability

SPECIFICATIONS

* Maximum Charge Current is 25% of the 8 Hr. Rate

Nominal Voltage (V)	Rated Capacity Rate In Ah * 8 Hr	Ambient Temperature		Outer Dimensions								Weight		Terminal
		Charge / Discharge	Storage	L		W		H		TH		kg	lbs.	
				mm	in.	mm	in.	mm	in.	mm	in.			
12	160 Ah	-15 to 45°C (5 to 113°F)	-15 to 45°C (5 to 113°F)	556	21.9	125	4.9	280	11.0	280	11.0	52.7	116.2	Front-M6 Bolt Top-M8 Bolt

Amperes to Final voltage: 1.75V per cell @ 25°C (77°F)

DISCHARGE TIME (Hr)


2	3	4	5	6	7	8	9	10	12	20
62.6	44.7	35.1	29.2	25.2	22.2	20.0	18.1	16.6	14.1	8.9

Watts to Final voltage: 1.75V per cell @ 25°C (77°F)

DISCHARGE TIME (Hr)

2	3	4	5	6	7	8	9	10	12	20
739	526	414	343	296	260	234	212	194	165	104


PYL12V160FT 12V 160Ah-8Hr

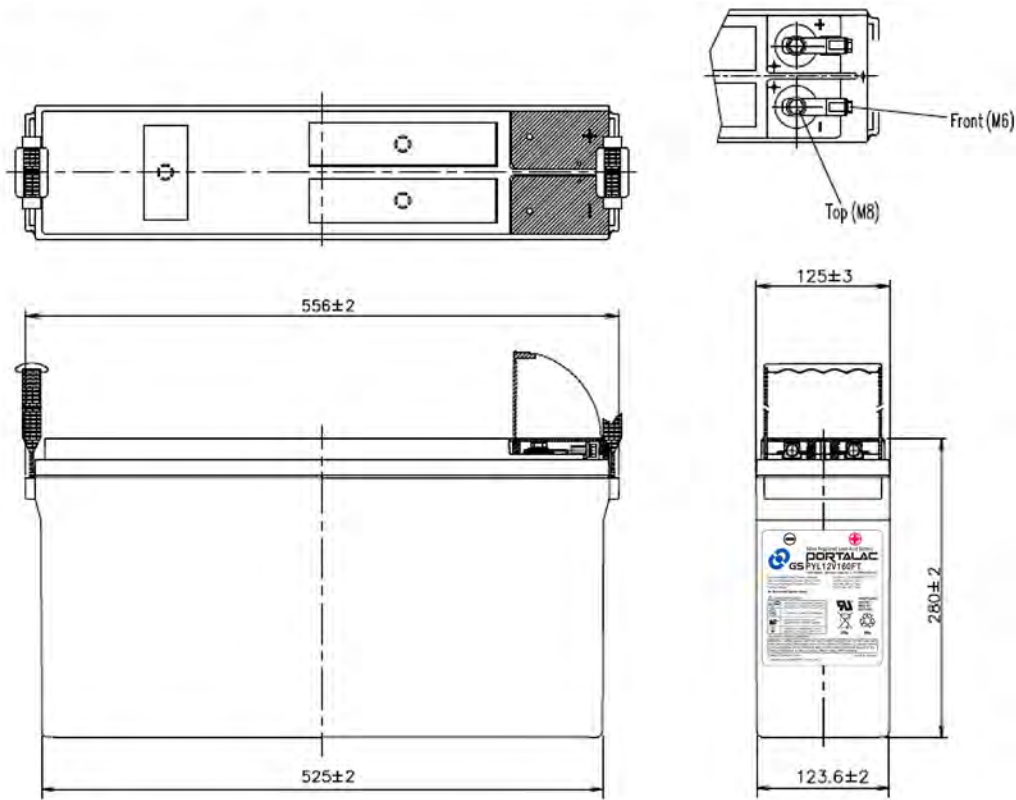


units: mm

- **Float Charge Voltage: 13.65V +/- 0.15V**
- **Temperature Compensation: The recommended compensation factor is -3mV/°C/cell. The standard center point for temperature compensation is 25°C.**
- **Internal Resistance: Approximately 2.5mΩ measured with 1kHz AC bridge**
- **Terminal Torque: 90 in. lbs. (top); 43.4 in. lbs. (front)**


Temperature and Discharge Capacity

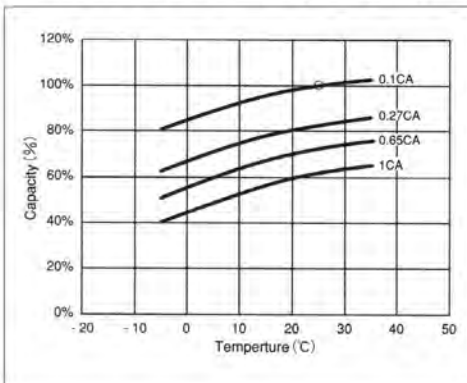

Self-discharge Characteristics

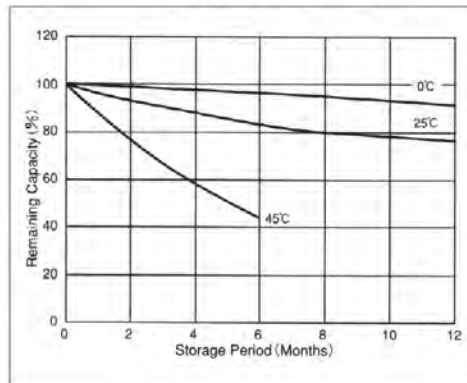

Charging Characteristics(2.275V/cell)

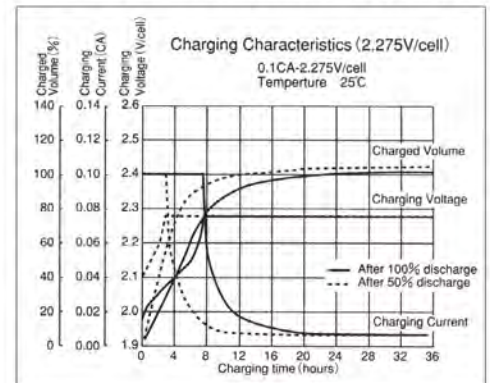

500-100-064 ver.1.0 01-2016

GS BATTERY (U.S.A.) INC. .
 1150 Northmeadow Parkway, Suite 110
 Roswell, GA 30076
 800-472-2879



International Certification
 (1).ISO 9001, TS16949
 (2).UL approval, Code :MH12970